


● Construction and dimensions of pattern (example)

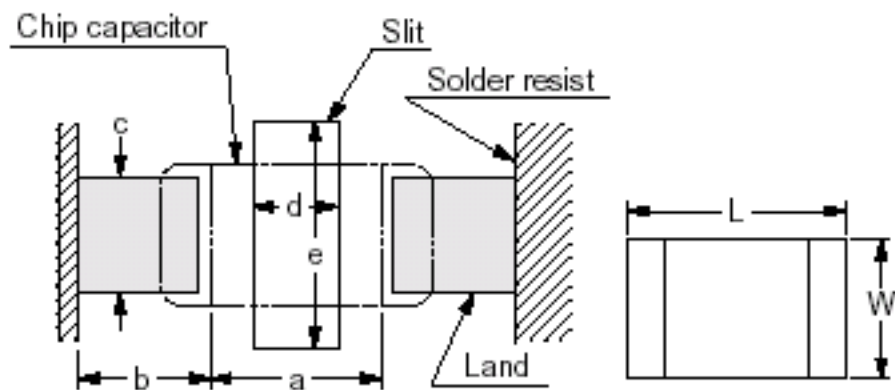

Preparing slit help flux cleaning and resin coating on the back of the capacitor.

● Flow soldering

(in mm)

LXW	a	b	c
2.0X1.25	1.0-1.2	0.9-1.0	0.8-1.1
3.2X1.6	2.2-2.6	1.0-1.1	1.0-1.4

● Reflow soldering

(in mm)

LXW	a	b	c	d	e
2.0X1.25	1.0-1.2	0.9-1.0	0.8-1.1	--	--
3.2X1.6	2.2-2.4	0.8-0.9	1.0-1.4	1.0-2.0	3.2-3.7
3.2X2.5	2.0-2.4	1.0-1.2	1.8-2.3	1.0-2.0	4.1-4.6
4.5X2.0	2.8-3.4	1.2-1.4	1.4-1.8	1.0-2.8	3.6-4.1
4.5X3.2	2.8-3.4	1.2-1.4	2.3-3.0	1.0-2.8	4.8-5.3
5.7X2.8	4.0-4.6	1.4-1.6	2.1-2.6	1.0-4.0	4.4-4.9
5.7X5.0	4.0-4.6	1.4-1.6	3.5-4.8	1.0-4.0	6.6-7.1