POWER CONNECTOR



CP35 Series 3.00mm(.118") Single Row Housing Connectors

- With locking latch mounting ears
- O Available in 2 through 12 circuits
- O Can be used CP35 Crimp terminal
- Thermal Polyester UL 94V-0, Color Black


















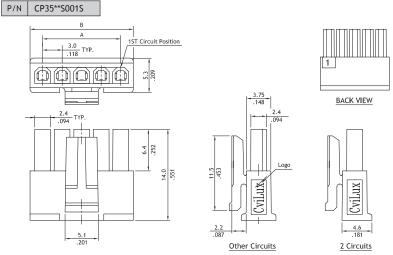

Circuits	Dimension		
	Α	В	
2	3.0(.118)	6.9(.272)	
3	6.0(.236)	9.9(.390)	
4	9.0(.354)	12.9(.508)	
5	12.0(.472)	15.9(.626)	
6	15.0(.591)	18.9(.744)	
7	18.0(.709)	21.9(.862)	
8	21.0(.827)	24.9(.980)	
9	24.0(.945)	27.9(1.098)	
10	27.0(1.063)	30.9(1.217)	
11	30.0(1.181)	33.9(1.335)	
12	33.0(1.299)	36.9(1.453)	

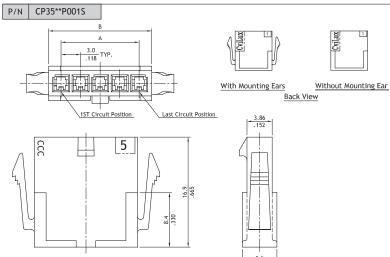

Circuits	Dimension		
	A	В	С
2	3.0(.118)	6.86(.270)	7.21(.284)
3	6.0(.236)	9.86(.388)	10.21(.402)
4	9.0(.354)	12.86(.506)	13.21(.520)
5	12.0(.472)	15.86(.624)	16.21(.638)
6	15.0(.591)	18.86(.742)	19.21(.756)
7	18.0(.709)	21.86(.860)	22.20(.874)
8	21.0(.827)	24.86(.978)	25.20(.992)
9	24.0(.945)	27.86(1.096)	28.20(1.110)
10	27.0(1.063)	30.86(1.214)	31.22(1.229)
11	30.0(1.181)	33.86(1.332)	34.22(1.347)
12	33.0(1.299)	36.86(1.450)	37.22(1.465)



Ordering Code



- 1 Series No.
- 2 No. of Circuits: 02 to 12
- ③ Type: S = Receptacle
- 4 Color: 001 = Color Black
- 5 Other Options: S = Single Row Type













- 1 Series No.
- 2 No. of Circuits: 02 to 12
- ③ Type: P = Plug
- 4 Options: 0 = With mounting ears R = Without mounting ears
- 5 Color: 01 = Color Black
- 6 Other Options:
 - S = Single Row Type *Special options consult manufacturer

