


# Specification of Gas discharge Tube

Part No. SPK-GT2R-75TP1

(3.2\*2.7\*4.5)

## 一、外形尺寸/DIMENSION (Unit:mm, Scale:10:1)

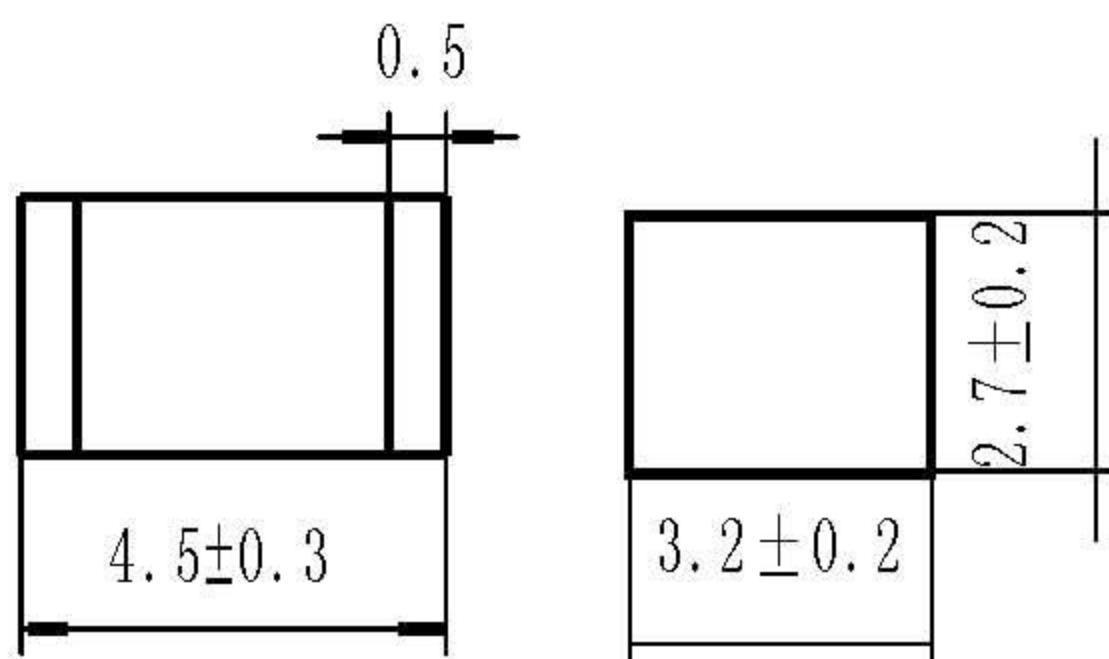

## 二、電性能參數/ELECTRICAL CHARACTERISTICS (terms in accordance with ITU-T K.12)

1、標稱直流擊穿電壓 (Vs)	
Nom. DC spark-over voltage	75V
2、直流擊穿電壓範圍 (100V/s)	
Tolerance of Vs	$\pm 20\%$
3、衝擊擊穿電壓 (1kV/ $\mu$ s)	
Impulse spark-over voltage	$\leq 650V$
4、耐脈衝衝擊電流 (8/20 $\mu$ s)	
Impulse discharge current	2kA
5、標稱耐工頻電流 (50Hz)	2A
Nom. alternating discharge current	
6、絕緣電阻 (DC50V)	$\geq 1G\Omega$
Insulation resistance	
7、極間電容 (1MHz)	$\leq 0.5pF$
Capacitance	
8、工作貯存溫度	
Operation and storage temperature	$-40 \sim 90^{\circ}C$
9、氣候類型	
Climatic category(IEC 60068-1)	40/90/21
10、無放射性 Without Radioactivity	

## 三、包裝資訊(TP1) Tape Package Information

- 1、數量 Quantity: 2500 pcs/reel box
- 2、尺寸 Measurement: reel box:  $\Phi 330 * 12.5$  mm

## 四、證書

Certificates

ISO9001:2000



E304047 E226846



SGS