

## VZH Series

### Features

- 4  $\phi$  ~ 18  $\phi$ , 105°C, 2,000 ~ 5,000 hours assured
- Large capacitance with ultra low impedance capacitors
- Designed for surface mounting on high density PC board
- RoHS compliance



Marking color: Black

### Specifications

| Items                                       | Performance   |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
|---|---|---------------|--|--------------------|------------------------------------|--------------|-----------------------------------|-----------------|------------------------|------|-----|--------------------|-----------------|-------------------|------|------|------|------|------|------|------|---|---|-------------------|---|---|---|---|---|---|---|---|---|
| Category Temperature Range                  | -55°C ~ +105°C  |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Capacitance Tolerance                       | ±20% (at 120 Hz, 20°C)  |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Leakage Current (at 20°C)                   | $I = 0.01CV$ or 3 ( $\mu$ A) whichever is greater (after 2 minutes)<br>Where, C = rated capacitance in $\mu$ F, V = rated DC working voltage in V   |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Tan $\delta$ (at 120 Hz, 20°C)              | <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Tan<math>\delta</math> (max)</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.16</td> <td>0.13</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> <td>0.07</td> </tr> </tbody> </table> <p>When the capacitance exceeds 1,000<math>\mu</math>F, 0.02 shall be added every 1,000<math>\mu</math>F increase.</p>   | Rated Voltage | 6.3  | 10                 | 16                                 | 25           | 35                                | 50              | 63                     | 80   | 100 | Tan $\delta$ (max) | 0.30            | 0.26              | 0.22 | 0.16 | 0.13 | 0.10 | 0.08 | 0.08 | 0.07 |   |   |                   |   |   |   |   |   |   |   |   |   |
| Rated Voltage                               | 6.3   | 10            | 16   | 25                 | 35                                 | 50           | 63                                | 80              | 100                    |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Tan $\delta$ (max)                          | 0.30  | 0.26          | 0.22   | 0.16               | 0.13                               | 0.10         | 0.08                              | 0.08            | 0.07                   |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Low Temperature Characteristics (at 120 Hz) | <p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C)/Z(+20°C)</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>   | Rated Voltage |  | 6.3                | 10                                 | 16           | 25                                | 35              | 50                     | 63   | 80  | 100                | Impedance Ratio | Z(-25°C)/Z(+20°C) | 4    | 3    | 2    | 2    | 2    | 2    | 2    | 2 | 2 | Z(-55°C)/Z(+20°C) | 8 | 5 | 4 | 3 | 3 | 3 | 3 | 3 | 3 |
| Rated Voltage                               |   | 6.3           | 10   | 16                 | 25                                 | 35           | 50                                | 63              | 80                     | 100  |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Impedance Ratio                             | Z(-25°C)/Z(+20°C)   | 4             | 3  | 2                  | 2                                  | 2            | 2                                 | 2               | 2                      | 2    |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
|   | Z(-55°C)/Z(+20°C)   | 8             | 5  | 4                  | 3                                  | 3            | 3                                 | 3               | 3                      | 3    |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Endurance                                   | <table border="1"> <thead> <tr> <th>Test Time</th> <td>2,000 Hrs for <math>\phi D \leq 6.3\text{mm}</math> &amp; <math>8 \times 6.5L</math> &amp; <math>10 \phi \times 7.7L</math>;<br/>5,000 Hrs for <math>\phi D \geq 8\text{mm}</math></td> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>Within <math>\pm 30\%</math> of initial value</td> </tr> <tr> <td>Tan<math>\delta</math></td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 ~ 5,000 hours at 105°C.</p> | Test Time     | 2,000 Hrs for $\phi D \leq 6.3\text{mm}$ & $8 \times 6.5L$ & $10 \phi \times 7.7L$ ;<br>5,000 Hrs for $\phi D \geq 8\text{mm}$ | Capacitance Change | Within $\pm 30\%$ of initial value | Tan $\delta$ | Less than 300% of specified value | Leakage Current | Within specified value |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Test Time                                   | 2,000 Hrs for $\phi D \leq 6.3\text{mm}$ & $8 \times 6.5L$ & $10 \phi \times 7.7L$ ;<br>5,000 Hrs for $\phi D \geq 8\text{mm}$  |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Capacitance Change                          | Within $\pm 30\%$ of initial value  |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Tan $\delta$                                | Less than 300% of specified value   |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Leakage Current                             | Within specified value  |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Shelf Life Test                             | <table border="1"> <thead> <tr> <th>Test Time</th> <td>1,000 Hrs</td> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>Within <math>\pm 30\%</math> of initial value</td> </tr> <tr> <td>Tan<math>\delta</math></td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.</p>  | Test Time     | 1,000 Hrs  | Capacitance Change | Within $\pm 30\%$ of initial value | Tan $\delta$ | Less than 300% of specified value | Leakage Current | Within specified value |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Test Time                                   | 1,000 Hrs   |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Capacitance Change                          | Within $\pm 30\%$ of initial value  |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Tan $\delta$                                | Less than 300% of specified value   |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Leakage Current                             | Within specified value  |               |  |                    |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Ripple Current and Frequency Multipliers    | <table border="1"> <thead> <tr> <th>Frequency(Hz)</th> <th>50, 60</th> <th>120</th> <th>1k</th> <th>10k up</th> </tr> </thead> <tbody> <tr> <td>Multiplier</td> <td>0.60</td> <td>0.70</td> <td>0.85</td> <td>1.0</td> </tr> </tbody> </table>  | Frequency(Hz) | 50, 60   | 120                | 1k                                 | 10k up       | Multiplier                        | 0.60            | 0.70                   | 0.85 | 1.0 |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Frequency(Hz)                               | 50, 60  | 120           | 1k   | 10k up             |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |
| Multiplier                                  | 0.60  | 0.70          | 0.85   | 1.0                |                                    |              |                                   |                 |                        |      |     |                    |                 |                   |      |      |      |      |      |      |      |   |   |                   |   |   |   |   |   |   |   |   |   |

### Diagram of Dimensions

Fig. 1


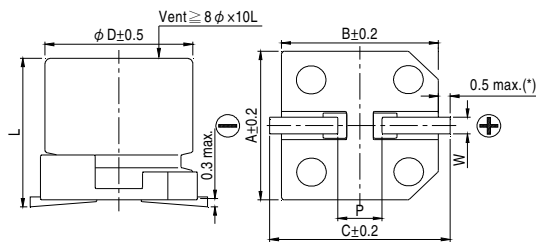


Fig. 2

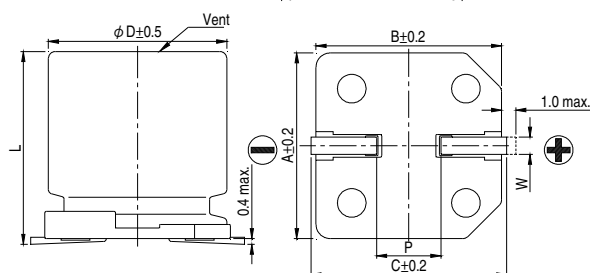

### Lead Spacing and Diameter


Unit: mm

| $\phi D$ | L              | A    | B    | C    | W         | P $\pm$ 0.2 | Fig. No. |
|----------|----------------|------|------|------|-----------|-------------|----------|
| 4        | 5.7 $\pm$ 0.3  | 4.3  | 4.3  | 5.1  | 0.5 ~ 0.8 | 1.0         | 1        |
| 5        | 5.7 $\pm$ 0.3  | 5.3  | 5.3  | 5.9  | 0.5 ~ 0.8 | 1.5         | 1        |
| 6.3      | 5.7 $\pm$ 0.3  | 6.6  | 6.6  | 7.2  | 0.5 ~ 0.8 | 2.0         | 1        |
| 6.3      | 7.7 $\pm$ 0.3  | 6.6  | 6.6  | 7.2  | 0.5 ~ 0.8 | 2.0         | 1        |
| 8        | 6.5 $\pm$ 0.3  | 8.3  | 8.3  | 9.0  | 0.5 ~ 0.8 | 2.3         | 1        |
| 8        | 10 $\pm$ 0.5   | 8.3  | 8.3  | 9.0  | 0.7 ~ 1.1 | 3.1         | 1        |
| 10       | 7.7 $\pm$ 0.3  | 10.3 | 10.3 | 11.0 | 0.7 ~ 1.3 | 4.7         | 1        |
| 10       | 10 $\pm$ 0.5   | 10.3 | 10.3 | 11.0 | 0.7 ~ 1.3 | 4.7         | 1        |
| 12.5     | 13.5 $\pm$ 0.5 | 13.0 | 13.0 | 13.7 | 1.1 ~ 1.4 | 4.4         | 2        |
| 12.5     | 16 $\pm$ 0.5   | 13.0 | 13.0 | 13.7 | 1.1 ~ 1.4 | 4.4         | 2        |
| 16       | 16.5 $\pm$ 0.5 | 17.0 | 17.0 | 18.0 | 1.1 ~ 1.4 | 6.4         | 2        |
| 16       | 21.5 $\pm$ 0.5 | 17.0 | 17.0 | 18.0 | 1.1 ~ 1.4 | 6.4         | 2        |
| 18       | 16.5 $\pm$ 0.5 | 19.0 | 19.0 | 20.0 | 1.1 ~ 1.4 | 6.4         | 2        |
| 18       | 21.5 $\pm$ 0.5 | 19.0 | 19.0 | 20.0 | 1.1 ~ 1.4 | 6.4         | 2        |


(\*): For 4 ~ 6.3  $\phi$  is 0.4 max.

### Marking


$\phi D \leq 6.3 \text{ mm}$

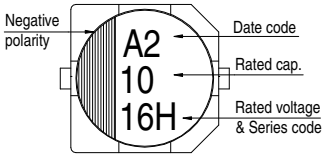

$\phi D = 8 \sim 10 \text{ mm}$

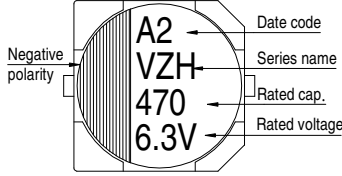

$\phi D \geq 12.5 \text{ mm}$



Dimension:  $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100k Hz, 105°C

Impedance:  $\Omega$ / at 100k Hz, 20°C

### Dimension and Permissible Ripple Current

| Rated Volt. (V <sub>DC</sub> ) |          | 6.3V (0J)         |       |       | 10V (1A)          |       |       | 16V (1C)          |       |       | 25V (1E)          |       |       | 35V (1V)          |       |       | 50V (1H)          |       |       |
|--------------------------------|----------|-------------------|-------|-------|-------------------|-------|-------|-------------------|-------|-------|-------------------|-------|-------|-------------------|-------|-------|-------------------|-------|-------|
| Cap. ( $\mu\text{F}$ )         | Contents | $\phi D \times L$ | Imp.  | mA    | $\phi D \times L$ | Imp.  | mA    | $\phi D \times L$ | Imp.  | mA    | $\phi D \times L$ | Imp.  | mA    | $\phi D \times L$ | Imp.  | mA    | $\phi D \times L$ | Imp.  | mA    |
| 1                              | 010      |                   |       |       |                   |       |       |                   |       |       |                   |       |       |                   |       |       | 4×5.7             | 2.9   | 60    |
| 2.2                            | 2R2      |                   |       |       |                   |       |       |                   |       |       |                   |       |       |                   |       |       | 4×5.7             | 2.9   | 60    |
| 3.3                            | 3R3      |                   |       |       |                   |       |       |                   |       |       |                   |       |       |                   |       |       | 4×5.7             | 2.9   | 60    |
| 4.7                            | 4R7      |                   |       |       |                   |       |       |                   |       |       |                   |       |       | 4×5.7             | 1.35  | 80    | 5×5.7             | 1.52  | 85    |
| 10                             | 100      |                   |       |       |                   |       |       | 4×5.7             | 1.35  | 80    | 4×5.7             | 1.35  | 80    | 5×5.7             | 0.80  | 150   | 6.3×5.7           | 0.88  | 165   |
| 22                             | 220      | 4×5.7             | 1.35  | 80    | 4×5.7             | 1.35  | 80    | 5×5.7             | 0.80  | 150   | 5×5.7             | 0.80  | 150   | 6.3×5.7           | 0.44  | 230   | 6.3×5.7           | 0.88  | 165   |
| 33                             | 330      | 4×5.7             | 1.35  | 80    | 5×5.7             | 0.80  | 150   | 6.3×5.7           | 0.44  | 230   | 6.3×5.7           | 0.44  | 230   | 6.3×5.7           | 0.44  | 230   | 6.3×7.7           | 0.68  | 185   |
| 47                             | 470      | 5×5.7             | 0.80  | 150   | 6.3×5.7           | 0.44  | 230   | 6.3×5.7           | 0.44  | 230   | 6.3×5.7           | 0.44  | 230   | 6.3×5.7           | 0.44  | 230   | 6.3×7.7           | 0.68  | 185   |
| 68                             | 680      |                   |       |       |                   |       |       |                   |       |       | 6.3×5.7           | 0.44  | 230   | 8×6.5             | 0.36  | 280   | 8×10              | 0.34  | 369   |
| 100                            | 101      | 6.3×5.7           | 0.44  | 230   | 6.3×5.7           | 0.44  | 230   | 6.3×5.7           | 0.44  | 230   | 6.3×7.7           | 0.36  | 280   | 8×10              | 0.17  | 450   | 8×10              | 0.18  | 553   |
| 150                            | 151      | 6.3×5.7           | 0.44  | 230   | 6.3×5.7           | 0.44  | 230   | 6.3×7.7           | 0.36  | 280   | 8×6.5             | 0.36  | 280   | 8×10              | 0.17  | 450   | 10×10             | 0.18  | 553   |
| 220                            | 221      | 6.3×5.7           | 0.44  | 230   | 6.3×7.7           | 0.36  | 280   | 8×6.5             | 0.36  | 280   | 6.3×7.7           | 0.36  | 280   | 8×10              | 0.17  | 450   | 8×10              | 0.17  | 450   |
| 330                            | 331      | 8×6.5             | 0.36  | 280   | 8×10              | 0.17  | 450   | 10×7.7            | 0.17  | 450   | 8×10              | 0.17  | 450   | 10×7.7            | 0.17  | 450   | 8×10              | 0.17  | 450   |
| 470                            | 471      | 8×10              | 0.17  | 450   | 8×10              | 0.17  | 450   | 10×7.7            | 0.17  | 450   | 8×10              | 0.17  | 450   | 10×10             | 0.09  | 670   | 10×10             | 0.09  | 670   |
| 680                            | 681      | 8×10              | 0.17  | 450   | 10×7.7            | 0.17  | 450   | 10×10             | 0.09  | 670   | 10×10             | 0.09  | 670   | 12.5×13.5         | 0.070 | 820   | 12.5×16           | 0.060 | 950   |
| 1,000                          | 102      | 8×10              | 0.17  | 450   | 10×10             | 0.09  | 670   | 10×10             | 0.09  | 670   | 12.5×13.5         | 0.070 | 820   | 12.5×16           | 0.060 | 950   | 16×16.5           | 0.073 | 1,000 |
| 1,500                          | 152      | 10×10             | 0.09  | 670   | 12.5×13.5         | 0.070 | 820   | 12.5×16           | 0.060 | 950   | 12.5×16           | 0.060 | 950   | 16×16.5           | 0.054 | 1,260 | 16×16.5           | 0.054 | 1,260 |
| 2,200                          | 222      | 12.5×13.5         | 0.070 | 820   | 12.5×16           | 0.060 | 950   | 16×16.5           | 0.054 | 1,260 | 16×16.5           | 0.054 | 1,260 | 18×16.5           | 0.048 | 1,500 | 18×21.5           | 0.038 | 1,750 |
| 3,300                          | 332      | 12.5×16           | 0.060 | 950   | 16×16.5           | 0.054 | 1,260 | 16×16.5           | 0.054 | 1,260 | 16×21.5           | 0.038 | 1,630 | 18×16.5           | 0.048 | 1,500 | 18×21.5           | 0.038 | 1,750 |
| 4,700                          | 472      | 16×16.5           | 0.054 | 1,260 | 16×16.5           | 0.054 | 1,260 | 18×16.5           | 0.048 | 1,500 | 16×21.5           | 0.038 | 1,630 |                   |       |       |                   |       |       |
| 6,800                          | 682      | 18×16.5           | 0.048 | 1,500 | 16×21.5           | 0.038 | 1,630 | 18×16.5           | 0.048 | 1,500 |                   |       |       |                   |       |       |                   |       |       |
| 8,200                          | 822      | 18×16.5           | 0.048 | 1,500 | 16×21.5           | 0.038 | 1,630 | 18×21.5           | 0.038 | 1,750 |                   |       |       |                   |       |       |                   |       |       |



Dimension:  $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Impedance:  $\Omega$ / at 100k Hz, 20°C

### Dimension and Permissible Ripple Current

| Rated Volt. (Vdc) |          | 63V (1J)          |       |       | 80V (1K)          |      |     | 100V (2A)         |      |     |
|-------------------|----------|-------------------|-------|-------|-------------------|------|-----|-------------------|------|-----|
| Cap. ( $\mu$ F)   | Contents | $\phi D \times L$ | Imp.  | mA    | $\phi D \times L$ | Imp. | mA  | $\phi D \times L$ | Imp. | mA  |
| 4.7               | 4R7      | 5×5.7             | 1.90  | 70    |                   |      |     |                   |      |     |
| 10                | 100      | 6.3×5.7           | 1.20  | 130   |                   |      |     |                   |      |     |
| 22                | 220      | 6.3×7.7           | 0.90  | 150   | 8×10              | 1.3  | 130 | 8×10              | 1.3  | 130 |
| 33                | 330      | 8×10              | 0.50  | 280   | 8×10              | 1.3  | 130 | 10×10             | 0.7  | 200 |
| 47                | 470      | 8×10              | 0.50  | 280   | 10×10             | 0.7  | 200 | 10×10             | 0.7  | 200 |
| 100               | 101      | 10×10             | 0.25  | 450   | 10×10             | 0.7  | 200 | 12.5×13.5         | 0.32 | 450 |
| 150               | 151      | 12.5×13.5         | 0.15  | 700   | 12.5×13.5         | 0.32 | 450 | 16×16.5           | 0.17 | 650 |
| 220               | 221      | 12.5×13.5         | 0.15  | 700   | 16×16.5           | 0.17 | 650 | 16×16.5           | 0.17 | 650 |
|                   |          |                   |       |       |                   |      |     | 18×21.5           | 0.15 | 950 |
| 330               | 331      | 16×16.5           | 0.082 | 900   | 16×16.5           | 0.17 | 650 | 18×16.5           | 0.15 | 850 |
|                   |          |                   |       |       |                   |      |     | 16×21.5           | 0.15 | 900 |
| 470               | 471      | 16×16.5           | 0.082 | 900   | 16×21.5           | 0.15 | 900 | 18×21.5           | 0.15 | 950 |
| 680               | 681      | 18×16.5           | 0.080 | 1,150 | 18×21.5           | 0.15 | 950 |                   |      |     |
|                   |          | 16×21.5           | 0.080 | 1,150 |                   |      |     |                   |      |     |
| 1,000             | 102      | 18×21.5           | 0.06  | 1,250 |                   |      |     |                   |      |     |

### Part Numbering System

VZH Series 470 $\mu$ F

$\pm 20\%$

6.3V

Carrier Tape

8 $\phi$  × 10L

Pb-free and PET coating case

**VZH**

**471**

**M**

**OJ**

**TR**

-

**0810**

Series Name ..... Capacitance ..... Capacitance Tolerance ..... Rated Voltage ..... Package Type ..... Terminal Type ..... Case size ..... Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 15.