


SR22 THRU SR29

MINI SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER VOLTAGE - 20 to 90 Volts CURRENT - 2.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier majority carrier conduction
- Low power loss, High efficiency
- High current capability, low V_F
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260 $^{\circ}$ C/10 seconds at terminals

SMA/DO-214AC

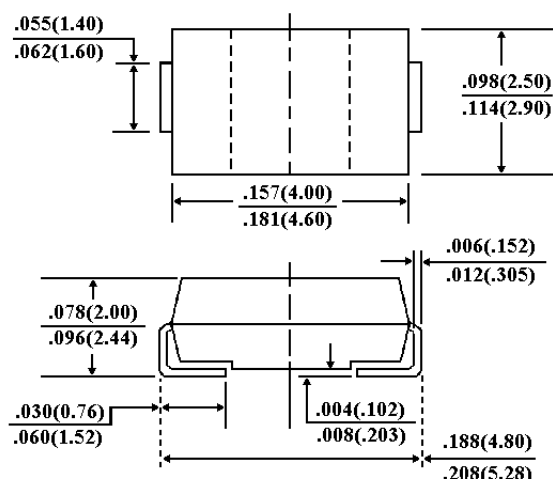

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode

Standard packaging: 12mm tape (EIA-481)

Weight: 0.002 ounce, 0.064 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 $^{\circ}$ C ambient temperature unless otherwise specified.

Resistive or inductive load.

| | SYMBOLS | SR22 | SR23 | SR24 | SR25 | SR26 | SR28 | SR29 | UNITS |
|--|--------------------------------------|-------------|------|------|------|------|------|------|----------------|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 20 | 30 | 40 | 50 | 60 | 80 | 90 | Volts |
| Maximum RMS Voltage | V_{RMS} | 14 | 21 | 28 | 35 | 42 | 56 | 64 | Volts |
| Maximum DC Blocking Voltage | V_{DC} | 20 | 30 | 40 | 50 | 60 | 80 | 90 | Volts |
| Maximum Average Forward Rectified Current at T_L (See Figure 1) | $I_{(AV)}$ | 2.0 | | | | | | | Amps |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method) | I_{FSM} | 50.0 | | | | | | | Amps |
| Maximum Instantaneous Forward Voltage at 2.0A (Note 1) | V_F | 0.5 | | | 0.70 | | 0.85 | | Volts |
| Maximum DC Reverse Current $T_A=25^{\circ}$ C (Note 1) At Rated DC Blocking Voltage $T_A=100^{\circ}$ C | I_R | 0.5 20.0 | | | | | | | mA |
| Maximum Thermal Resistance (Note 2) | R ϵ KJL R ϵ KJA | 17 75 | | | | | | | $^{\circ}$ C/W |
| Operating Junction Temperature Range | T_J | -50 to +125 | | | | | | | $^{\circ}$ C |
| Storage Temperature Range | T_{STG} | -50 to +150 | | | | | | | $^{\circ}$ C |

NOTES:

1. Pulse Test with PW=300 μ g sec, 2% Duty Cycle.
2. Mounted on P.C.Board with 8.0mm² (.013mm thick) copper pad areas.

RATING AND CHARACTERISTIC CURVES

SR22 THRU SR29

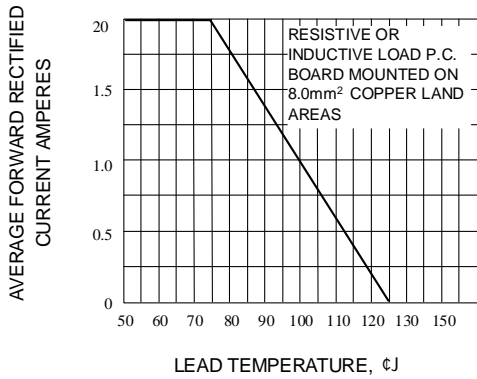


Fig. 1-FORWARD CURRENT DERATING CURVE

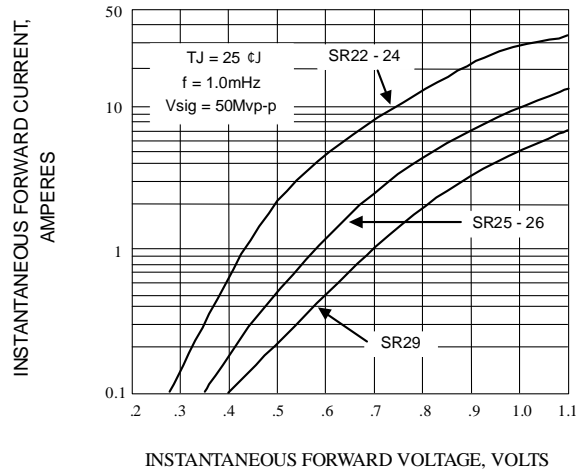


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

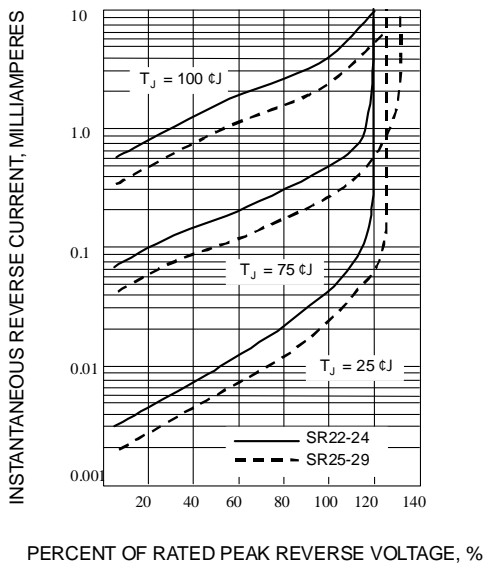


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

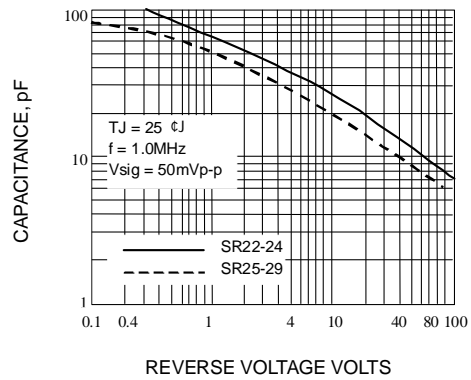


Fig. 4-TYPICAL JUNCTION CAPACITANCE

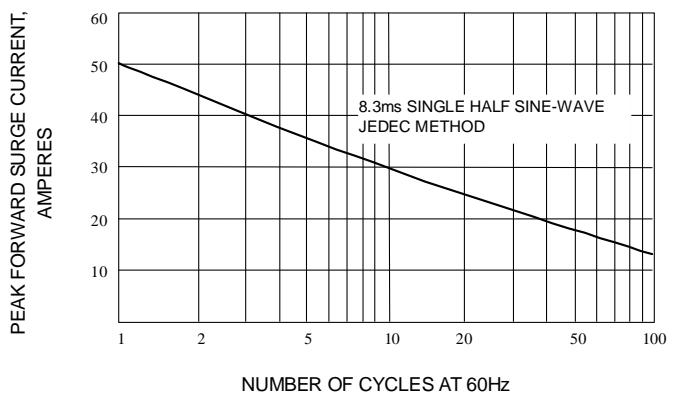


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT